


**FC-0914**  
**Feature List Specifications**

**FutureCall**

**Issue Date: 10-Jan-23**

	Descriptions	FC-0914
<b>General</b>	1 Line/2 Line (PSTN)	1
	Multiple Handset System	Yes
	Handsets-expands to #	4 (cordless handset)
	Handset Rename	Yes (max 10 char)
	Handsets barge in outside call	No
	Intercom HS to HS	Yes (support up to 1pair only)
	Intercom HS to base	N/A
	Intercom to HS to all	No
	Transfer calls- HS to HS	Yes
	Calls announced number only	No
	Slow playback	No
	Any Key Answer on HS	No
	Auto Off (by putting on cradle)	Yes
	Tone/Pulse Dialing	Yes; Default Tone
	Temporary Touch Tone	Yes for Plus dialing only
	Pre-Dialing	Yes
	Display Dial	Yes
	Speed Dial	M1 , M2 Keys 1,2,3 Long Push
	<b>Emergency Dial</b>	<b>911 One Press Dial</b>
	Speakerphone dialing from handset	Yes
	Handset Speakerphone	Yes
	Redial	Last 10 numbers
	Add Redial to Block list	Yes
	Flash (Swap)	Yes
	Reject call	No
	Hold Feature	No
	Mute Feature	Yes (EEPROM Option)
	Headset Jack	No
	Dial Pad on base	No
	Belt Clip	No
	Wall Mountable	No
	Hearing Aid Compatible (EU)	Yes
	Support Voice Mail (VMWI)	Yes
Clear Voice Mail indicator	Yes	
Set Date and Time	Yes	
Text language support	EN, FR, SP, PT, DE, NL, IT	
Support Line Power mode	No	
<b>Display</b>	<b>Handset</b>	
	HS LCD Type	HTN, positive, transfective
	HS Size (VA)	40 (w) x 27 (h) mm
	HS Display	
	number of characters and number of lines	12 characters (2 lines icon + 1 line Dot Matrix + 1 line 7-segement)
	Enlarge dialing digits	No
Touch screen	No	

**FC-0914**  
**Feature List Specifications**

Issue Date: 10-Jan-23

	Descriptions	FC-0914
	Call Timer	Yes
	Real Time Clock	Yes
	Contrast Adjustment	Yes
	<b>Base Unit</b>	
	BS LCD Type	N/A
	BS Size (VA)	N/A
	BS No. of Dots	N/A
	Touch screen	N/A
	Call Timer	N/A
	Real Time Clock	N/A
Brightness Adjustment	N/A	
Audio Features	<b>Handset</b>	
	Earpiece Volume control (L1/intercom, L2)	Yes (5 Steps)
	Speakerphone Volume control	Yes (5 Steps)
	Equalizer	No
	Audio Assist for Earpiece only	Yes, (+10dB on top of normal level)
	Ringer- Selectable	5 mono, 5 polyphonic tones
	Ringer-polyphonic precanned	No
	Ringer- Recordable	No
	Ringer-Vibrating	No
	Ringer Volume Control	5 steps
	Voice Announce (Talking CID)	No
	Talking CID (number only)	No
	Talking Digit	No
Talking Phonebook	No	
Battery (Handset)	Battery type	2.4V 300mAH AAAx2
	Standby time	100 hrs
	Talk Time	10 hrs
Caller ID Feature	Name/Number List	50 (saved in Base)
	Memory (Phonebook) Match ( I.e. Mom and Dad)	Yes
	Memory (Phonebook) Ringtone Match	Yes
	Voice Announce (Talking CID)	No
	Type II CID (include USA requirement)	Yes
	Save CID into phone book	Yes
	Save CID into block list	Yes
	Caller ID delete	Yes
Phonebook	# of phonebook entry x # digits x # characters	100 (saved in Base) x 16 digits x 12 characters
	Phonebook Edit	Yes
	Phonebook Delete	Yes
	Add Phonebook to VIP	Yes
	Talking Phonebook	No
	1-char/3-char search	1- char search
Alerts (tone)	<b>Handset</b>	
	Low Battery Audible Warning	Yes
	Out of range alert	Off-hook: Yes On-hook: No
	Keystone control	Yes (ON/ OFF)
	Message Alert tone	N/A
	<b>Base Unit</b>	
	Low Battery Audible Warning	N/A
Keystone control	No	
Message Alert tone	N/A	
LED Indicators	<b>Handset</b>	
	Charging	Yes
	Keypad backlit	Amber
	LCD backlit	Amber
	Visual Ringer indicator	RED
	Audio Assist	No
<b>Base Unit</b>		

**FC-0914**  
**Feature List Specifications**

**Issue Date:** 10-Jan-23

	<b>Descriptions</b>	<b>FC-0914</b>
	Charging	Yes
	Line in use or Answer Key for PSTN line(s)	Yes
<b>Others</b>	Support Reverse Charging	No
	ECO mode	NO
	Alarm	Yes
	Telephone Plug	NO
	AC adaptor	Black, 1.5m, 2-round pins
	Line cord	Black, 1.5m, RJ11-RJ11

**FC-0914**  
**Feature List Specifications**



Issue Date: 10-Jan-23

	Descriptions	FC-0914
--	--------------	---------

**Product & Key Functions**



**Handset / Base Station Keys**

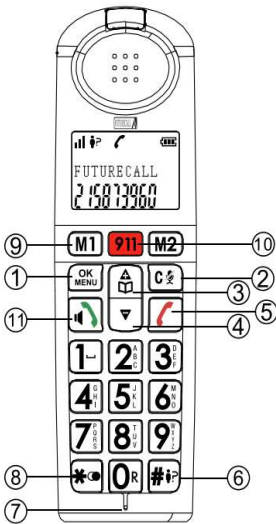

1	OK / Menu key
2	Back / Intercom key
3 & 4	Navigation key
5	Hang-up / Exit key
6	# key - Press to insert #; In idle mode: Press and hold to access the call list.
7	0 key - During a call: Press and hold to insert a flash (R).
8	* key - Press to insert *; In idle mode: press and hold to access the redial lis
9	M1, M2 key - In idle mode/during a call: Press to dial pre-recorded number stored in direct mem.
10	911 911 Quick Dial Key One press to dial out 911 emergency number.
11	Talk key/Loudspeaker
12	Paging key - To locate handset/to start registration procedure.